




70 RT HP is a new range of 16A to 160A switch disconnectors in isolating material and metal, supplied in a box. Available in control and emergency versions, the range is completed by board versions for front-panel or DIN rail assembly, in 16 to 63A options, all of which can be equipped with auxiliary contacts. These devices have been designed to deliver the ultimate in reliability, functionality and performance. They offer a technologically advanced solution that simplifies installation, reduces wiring times and ensures maximum safety and robustness, even in the most demanding conditions, thanks to the use of high-performance materials.

| Version | Box | Material | Insulation |
|---------------------------|--------------------------|------------------------|---------------------------|
| Type | For emergency | Rated current (A) | 160 |
| Circuit breaker | Rotary isolator | IP degree | IP66/IP67/IP69 |
| Mechanical resistance | IK08 | Ambient temperature | -25 +60 °C |
| Lid screws (no. and type) | 4 insulation | Lockable | YES (max. 3 locks in OFF) |
| Complete with | Max. 1 auxiliary contact | Current in AC22 (415V) | 160 |
| Current in AC23 (415V) | 125 | Cable section | Max 70 mm ² |
| Outer dim. LxHxD (mm) | 236,5x316x178 | Electrocod | 1742 |



DIMENSIONAL

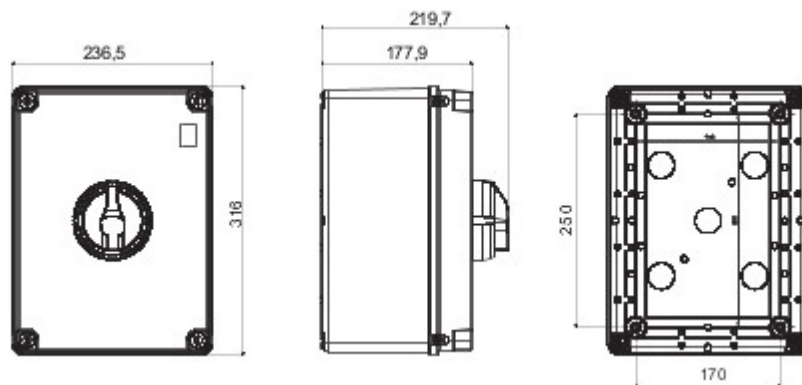

TECHNICAL SYMBOLOGY

IP

IP66/IP67/IP69

IK

IK08

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 13/05/2020

Data, measures, designs and pictures are for information purpose only, last update . They can be changed at any moment, therefore it is always recommended to read the last updated version

published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.