



APACLED1/60/CW



Features

High performance maintenance free LED panel

Suitable for installation in offices, educational buildings, retail and healthcare premises

Slimline design allows for installation into shallow ceiling voids

TPa as standard

UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort

Cool white, warm white and daylight options

Self-Test Panel Pod and Sensor Pod compatible

Powered by Philips

LED lifespan L80 B10 54,000 hours

Dimmable and OCTO options available

General Information


Lamp Type	LED
IP Rating	IP44
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Surface/Recessed/Suspended
Warranty (Years)	5
CE Mark	Yes
Length (mm)	595
Width (mm)	595
Height (mm)	36
Accessories	AIRMLLED/POD/3NM/ST, AIRMLLED/POD/MWS, APACLED/SK, AERMLED/60/SMF

Technical Information

Wattage	28W
Lumens Delivered	3300lm
Lm/W	118lm
CRI	Ra 80
CCT	4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-10°C to 45°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	No
Suitable for suspended mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
With light source	Yes
Suitable for number of lamps	1
Nominal voltage	220-240 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP44
Protection class	II
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	28 W
Rated luminous flux acc. IEC 62722-2-1	3300 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	118 lm/W
Width	595 mm
Height/depth	36 mm
Length	595 mm

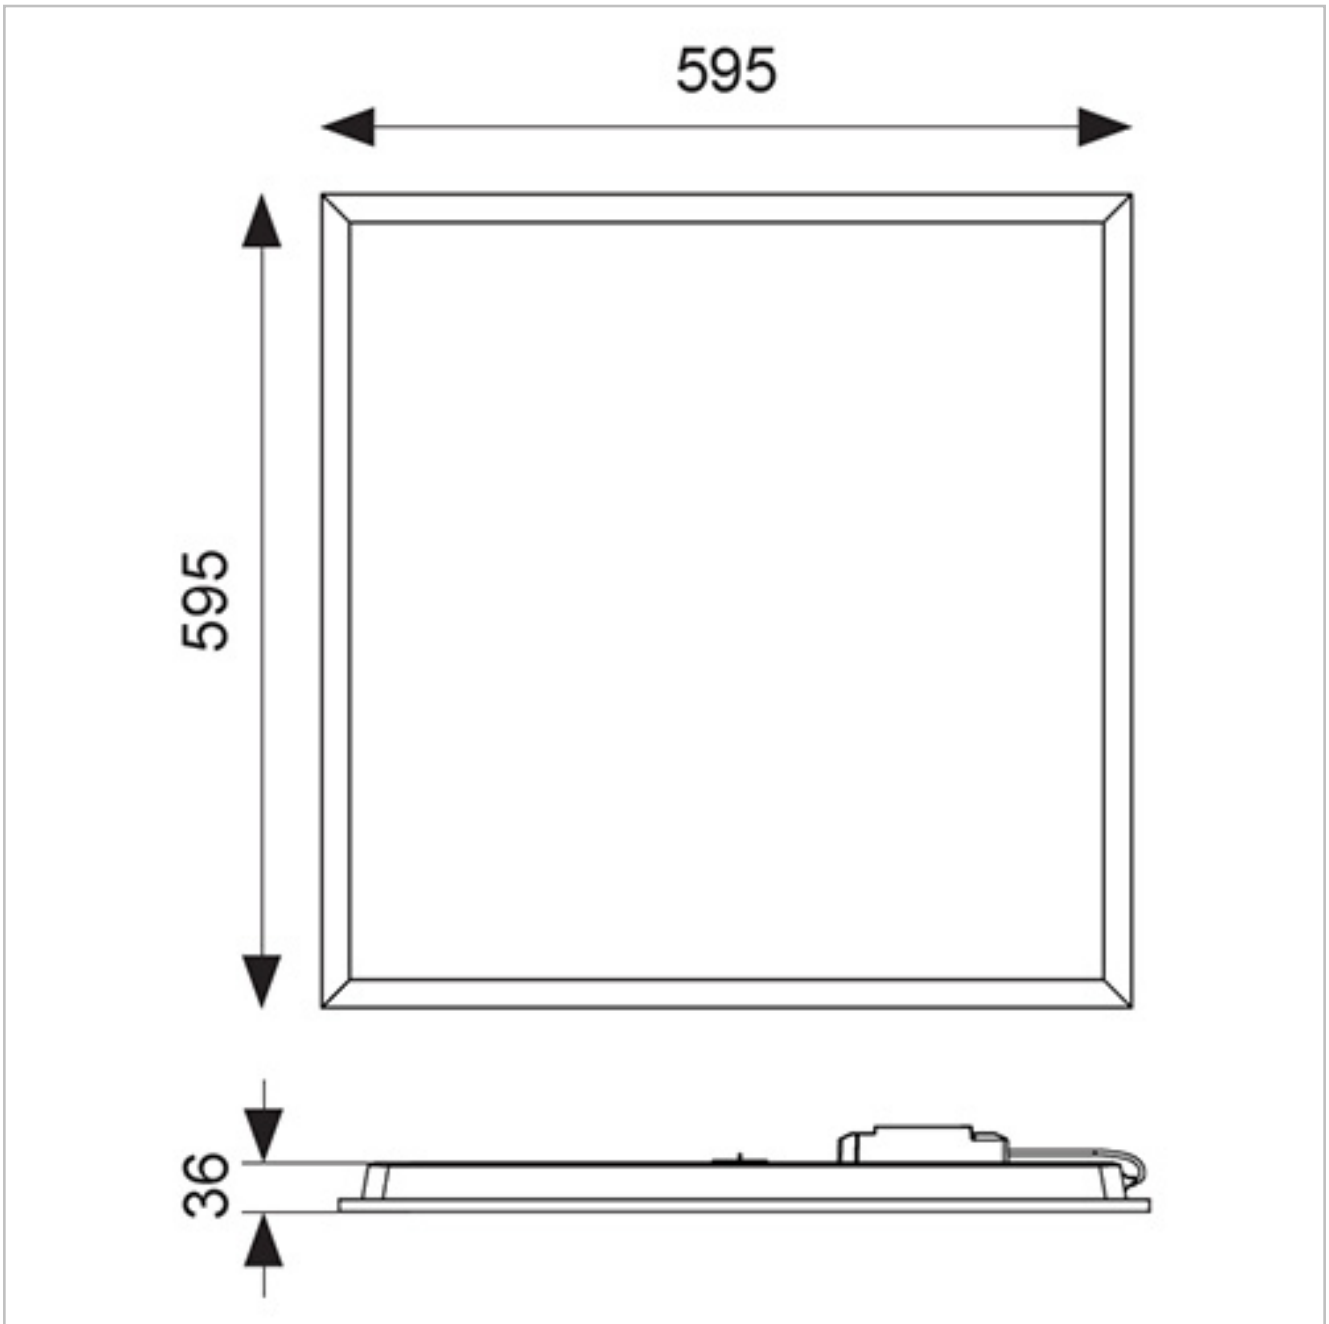

Datasheet generated from <https://onetimepim.com> last updated Monday, September 6, 2021 2:38:32 PM