

General Information

Dimensions (mm)	289.7 (W) x 621.6 (D) x 73.6 (H)
Materials	Body: ABS; Diffuser: Polycarbonate
Colour	Black (RAL9011)
Product Weight (Kg)	5.11
Spigot Diameter (mm)	50
Ingress Protection	IP65
Impact Rating (IK)	07
Flammability Rating	B1
Mounting	Wall or Post
Warranty (Years)	1

Supply & Power Information

Safety Class	III
LED Wattage (W/M)	40
Input Current (mA)	3120
Operating Temperature (°C)	-20 to +60

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	4750
Efficacy (lm/W)	120
Beam Angle (°)	140 x 70
LED Lifetime (L70) (Hours)	35000

Additional Information

Press 'Power Button' to manually select Mode**.

Mode A: Constant Lighting Mode

When fully charged and PIR activated the fitting will turn on, maintaining 60% output for 4 hours then switching to "Sensor Mode".

Mode B: Sensor Mode

When the PIR is activated the fitting provides 100% output, then dims to 30% output after 20 seconds of no movement.

**The manual settings can be overridden by use of the remote control or visa versa.

Sensor Information

Remote supplied. Can be set by manual selection or by remote control.


Installation Height (m)	3 to 6
Detection Distance (m)	8 to 12
Maximum Detection Angle (°)	120

Emergency Backup Information

Battery Specification	LiFePO4 32700, 9.6V 12000mAh
-----------------------	------------------------------

Fixings Supplied

Wall and post mounting brackets, wall fixings and installation instructions.

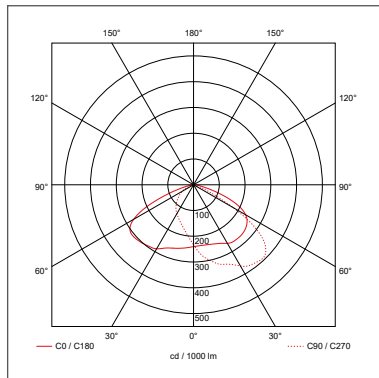

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
 Tamworth, Staffordshire, B79 7UL United Kingdom
 T: +44 (0)1827 300640
 E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

