

Alto

Occasional Use Drying Room Circulator

Pull cord, step down thermostat

2.0 kW



P.108


Usage

Occasional use drying room circulator

Features and Benefits

- Pull cord operation
- Element on neon indicator
- Wall mounted
- 2 power settings, 1.0 and 2.0 kW – set at installation
- In 2.0 kW mode thermostat reduces output to 1.0 kW when the room is warm and steps back up to 2.0 kW when required
- Internal thermostat – set at installation
- Minimum installation height 1.8m from the floor
- Not suitable for kitchen or bathroom use

Product Code	Power (kW)	Timer	Current (amps)
ALTO	2.0	No	9

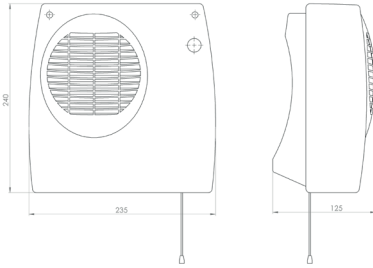

Outer Casing

ABS

Controls

Pull cord on/off operation.
Neon indicator to show when in operation.
Power level selection and thermostat under the main cover.

Safety

Overheat temperature protection.

IP Rating

IP21

Installation

Wall mounting kit included and must be used.

The unit has to be fitted at least 1.8m from the floor.

Electrical Connection

Installation must comply with current IEE regulations.

The product should be connected to the fixed wiring of the property via a double pole fused spur with a minimum break capacity of 13 amps.

Cable pre-wired (0.9m), white cable, entry to the bottom right of the unit.

Class II

Approvals

CE

Standard Warranty

1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
ALTO	240	235	125	1.4