


## NS132USB-3C

### 2 Gang Socket Outlet with 1xUSB Type C & 1xUSB Type A



A new take on traditional moulded wiring accessories manufactured in bright white Urea.

#### Technical Drawing

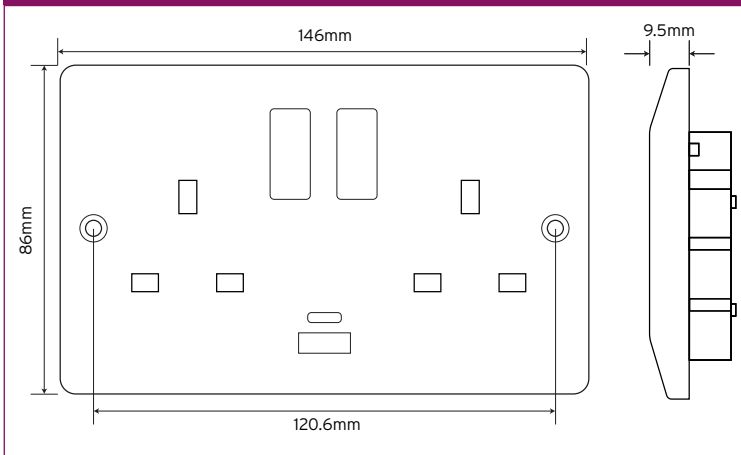

#### Technical Specifications

<b>Material Composition</b>	Front Plate, Rocker Switch & Rear Housing- Urea Terminals: Brass, Terminal Screws - Steel & Yellow Passivated Earth Strap: Mild Steel, Silver "on-lay" Copper/ Brass Contacts
<b>Voltage</b>	240V ~ 50Hz
<b>Current Rating</b>	13A
<b>Terminal Size</b>	5mm $\varnothing$
<b>Torque Value</b>	2Nm
<b>Cable Size</b>	4 x 2.5mm <sup>2</sup>
<b>Back Box Depth</b>	25mm
<b>Anti Microbial Certified</b>	Yes
<b>USB Charging Output</b>	5V DC, 3.1A
<b>USB Output Connector</b>	1x USB Type "A" & 1x USB Type "C"
<b>USB Standby Current</b>	2mA
<b>IP Rating</b>	IP20
<b>Warranty</b>	2 Year
<b>Operational Temperature</b>	-5° to +40° C
<b>Standards</b>	BS 1363-2:1995+A4:2012, EN 61000-6-1:2007 EN 61000-6-3:2007+A1:2011 The EMC directive 2014/30/EU
<b>Dimensions</b>	86x146x9.5mm (HxWxD)
<b>Switched</b>	Yes