



## ADLED2/BV/CCT/MWS



### Features

All polycarbonate multi-purpose LED round bulkhead

LED performance exceeds CFL equivalents

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

LED lifespan L70 56,000 hours


## General Information

Lamp Type	LED
Colour / Finish	Black / Visiluxe
Integral Microwave Sensor	Yes
IP Rating	IP65
IK Rating	IK09
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	260
Depth (mm)	65
Accessories	ADLED2/BZ/EYE/B, ADLED2/BZ/EYE/W, ADLED2/BZ/GRILL/B, ADLED2/BZ/GRILL/W


## Technical Information

Wattage	14W
Lumens Delivered	1271lm (Cool White), 1190lm (Warm White)
Lm/W	91lm (Cool White), 85lm (Warm White)
CRI	Ra 80
CCT	3000/4000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 25°C

Datasheet generated from <https://onetimepim.com> last updated Friday, July 30, 2021 11:32:19 AM

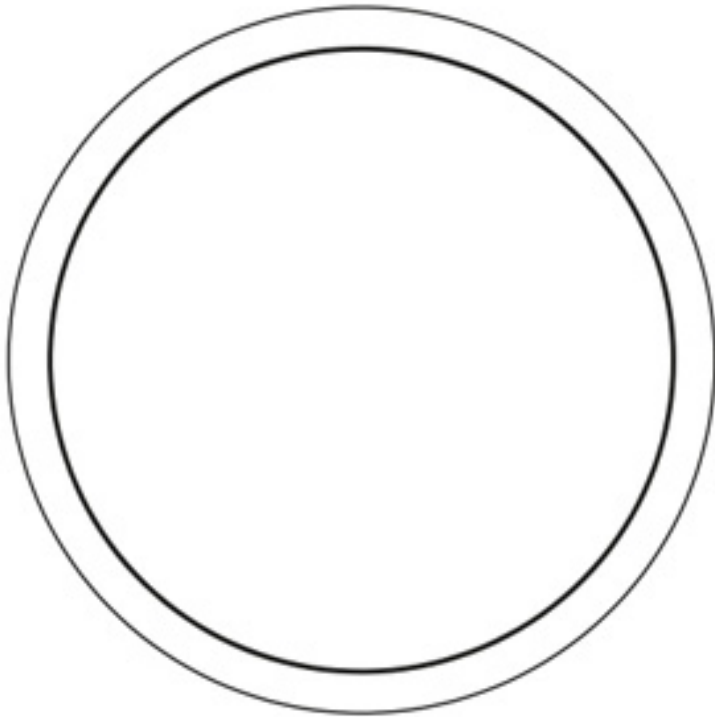

260

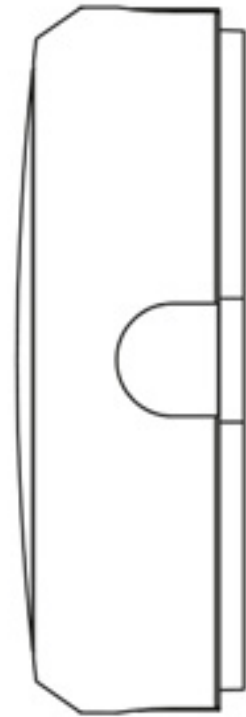

65