

JC050013

Toughflood Pro Symmetric Commercial

Toughflood Pro Symmetric Commercial 200W IP65 4000K Black

Features & Benefits

- Adjustable 180° tiltable bracket
- Pre-wired with 1m flex
- IP65 and IK08 protection



General Information

Mounting	Surface Mounted
Environment	Outdoor
Product Group	Floodlight
Color Finish	Black
Product Shape	Rectangular
Product Range	Toughflood Pro Symmetric
IK Rating	08
Overall Dimensions	325.6 x 390.83 x 56 mm
Width (mm)	325.6
Height (mm)	390.83
Depth (mm)	56
Product Weight(kg)	3.610
Light Source	LED
Additional Information	1m flex cable length
Recommended product location	Exterior, general security lighting
Method of fix	Mounting Bracket
IP Rating	65
Origin of manufacturer	China

Warranty	5 Year Warranty (See Website for terms and conditions)
Driver manufacturer	JCC
LED manufacturer/type	LumiLEDs/2835R
Customs Tariff code**	9405421000

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.782-0.957
Inrush current(Amps)	4.38A@28.4uS
Operating Frequency Hz	50/60
Secondary running current(mA)	630
Constant Current or Constant Voltage	Constant current
Luminaire Circuit Wattage1	200
Class	I
Output Voltage Max/Range (VDC)	270
Total Harmonic Distortion (THD)%	20
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.95
Input Electrical Connections	Live(L) Earth(E) Neutral(N)
Dimmable	No

Thermals

Thermal Cut Out	Yes
Operating Temperature Range °C	-25 to 50

Performance Data

LED Life (Hours)*	102000
Energy Rating	This product contains a light source of energy efficiency class D
Actual Lumen Output1	25000
Lumens Per Circuit Watt1	125
Color Rendering Index	80-89
CRI: Ra	80
Correlated Colour Temperature1	4000
Beam Angle °	110
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction




Primary Material	Aluminium
Outer Diffuser	Toughened glass
LED Brand	

Packaging

Product carton overall dimensions(cm)	35 x 6.5 x 40.5cm
Product Packaged Weight(kg)	3.8249
Quantity Per Outer Carton	4
Outer carton(L)- cm	36.80
Outer carton(W)- cm	28.8
Outer carton(H)- cm	46.7
Outer carton Net weight- kg	15.30kg
Outer carton Gross weight- kg	16.00kg
Product Bar Code EAN-13 Number	5052544123924
Outer carton Bar Code ITF-14 Number	15052544123921

Standards & Approvals

Manufactured in accordance to	BS EN 60598-2015,2-1,2-5
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

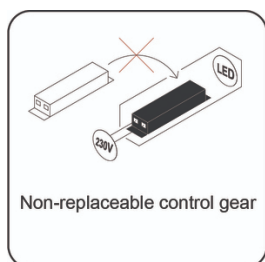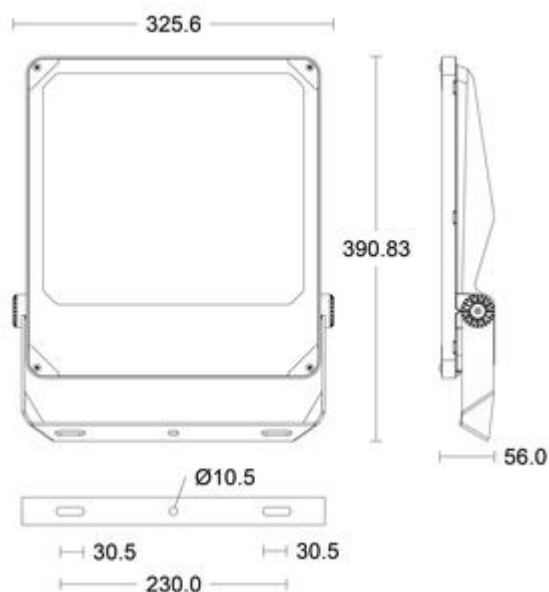

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.

Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 47 [20/11/2025]