

Arno

06258 ARN2FT18-W40

Arno, slim integrated batten, 2ft twin output 18W 4000K

- High efficiency of 110lm/W
- Supplied with long lead of 2/3 length of the luminaire
- 2 ranges for replacement of single and twin T8 battens



Overview

The Kosnic Arno Slimline Integrated Battens utilize high performance LEDs to offer outstanding lumen efficiency within a very economic package. The battens are a low-profile design suitable for a wide range of general lighting applications from commercial premises to warehouses, factories and garages.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal

Technical Summary

Product Code	ARN2FT18-W40
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	18 W
Power Factor	>0.94
Default CCT	4,000 K
CRI	≥82
Dimmable	N
Lumens Output Maximum	1,980 lm
Maximum Efficiency	110 lm/W
L80B10 Lifetime (h) @Ta 25 °C	50,000 h
Nominal Lifetime (h)	50,000 h
Weight	0.25Kg
Dimensions (L x W x D) (mm)	645x75x31

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



06258 ARN2FT18-W40

Accessories

Product Code	Description	Type
SUS02	Suspension kit (2 cables per bag) for Lena Volta III Volga	Suspension Kit


Overview

The Kosnic Arno Slimline Integrated Battens utilize high performance LEDs to offer outstanding lumen efficiency within a very economic package. The battens are a low-profile design suitable for a wide range of general lighting applications from commercial premises to warehouses, factories and garages.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal

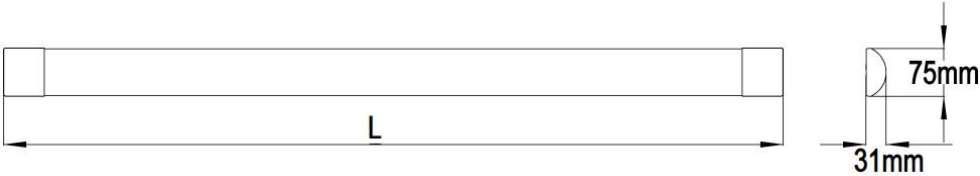

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

