
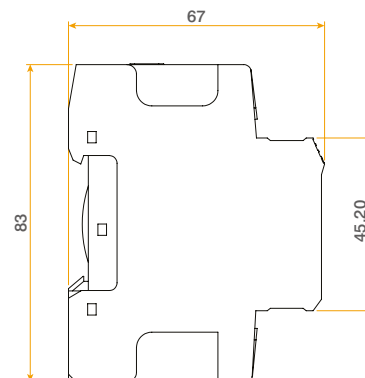


Product Code: CU4SPD275

Description: 3 Pole+N 275Vc 40kA Type 1 & 2 SPD with Copper Earth Plate & Tails

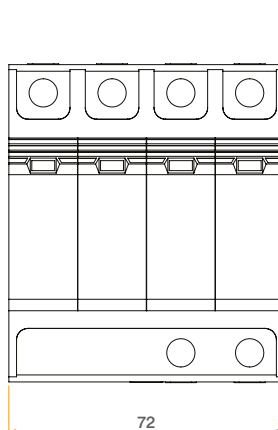

General Information

Dimensions (mm)	72 (W) x 83 (H) x 67 (D)
Colour	Light Grey
Maximum Continuous Operating Voltage (AC) (Uc)	275
SPD Type	Type 1 & 2
Nominal Discharge Current (kA) (In)	12.5 (T1), 20 (T2)
Maximum Discharge Current (kA) (Imax)	40
Response Time (ns) (tA)	<25
Compatible Earthing Systems	TT / TN
Visual Indicator Status (Green)	Normal Function
Visual Indicator Status (Red)	Cartridge Replaceable (Product Ref. CU4SPDC275)
SPD Terminal Capacity - L&N (mm ²)	
Number Of Poles	3+N
Ingress Protection	IP20
Operational Temperature (°C)	-40 to +70
Warranty (Years)	3
SPD Terminal Torque (Nm)	2
Standards	BS EN 61643-1-11

