


Product Code: TPMS3125K

Description: 3 Pole 125A Main switch Kit - 8, 12, 16, 20 & 24 Way

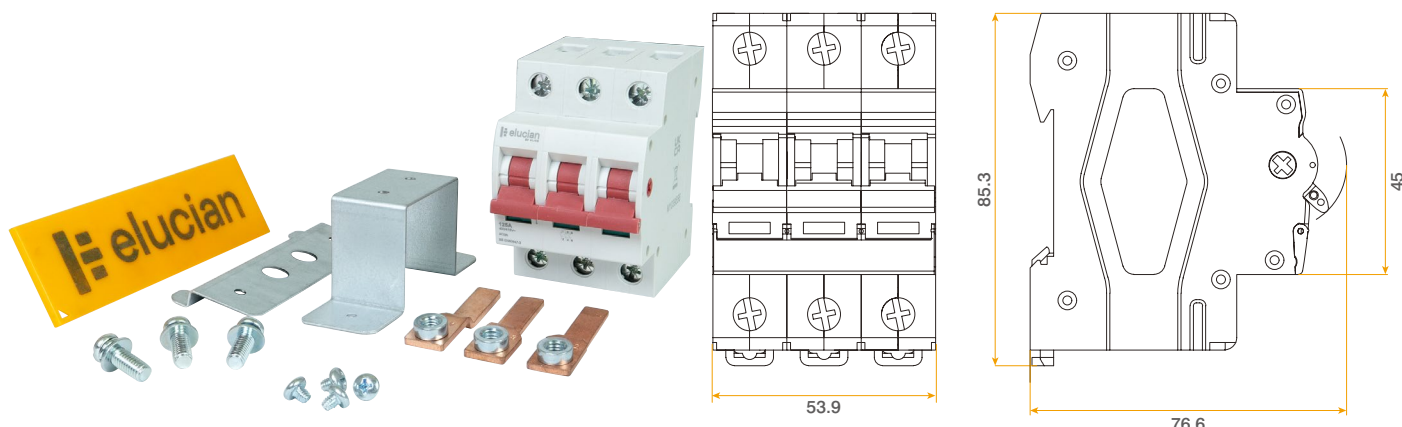

General Information

| | |
|---|------------------------|
| Colour | Light Grey |
| Rated Operational Voltage (AC) (Ue) | 415 |
| Frequency (Hz) | 50/60 |
| Maximum Rated Current (A) (In) | 125 |
| Utilisation Category | AC-22A |
| Rated Short Circuit Withstand Current (Icw) | 12 Ie, t=1s |
| Rated Short Circuit Making Capacity (Icm) | 20 Ie |
| Rated Making & Breaking Capacity | 3Ie, 1.05Ue, COS =0.65 |
| Rated Insulation Voltage (V) (Ui) | 690 |
| Impulse Withstand Voltage (Uimp) | 6000 |
| Main Switch Terminal Capacity (mm²) | 50 |
| Number Of Poles | 3 |
| Ingress Protection | IP20 |
| Operational Temperature (°C) | -5 to +35 |
| Warranty (Years) | 3 |
| Main Switch Terminal Torque (Nm) | 2.5 |

Standards BS EN 60947-3

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

