

High Power GLS

07823 A16-BC40

High Power A70 (GLS) 16W BC (B22) 4000K

- Colour temperature of 3000K, 4000K and 6500K
- Long life of 15,000h
- Save energy up to 85% compared with incandescent lamp



Overview

The Kosnic range of High Power GLS products brings the energy saving capabilities of LED technology. This range offers different CCT with high lumen output. The lamps can quickly replace filament products in general lighting applications, and once in place rapid payback is achieved.



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	15,000 h
Protection Rating	Class II
Installation Area	Internal

Technical Summary

Product Code	A16-BC40
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	16 W
Power Factor	0.55
Default CCT	4,000 K
SDCM of CCT	<6
CRI	80
Dimmable	N
Flicker	<1%
Lumens Output Maximum	1,901 lm
Maximum Efficiency	119 lm/W
L80B10 Lifetime (h) @Ta 25 °C	9,000 h
Nominal Lifetime (h)	15,000 h
Weight	0.058Kg
Dimensions (L x W x D) (mm)	140xØ71



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com


Kosnic.com

High Power GLS

07823 A16-BC40

Overview

The Kosnic range of High Power GLS products brings the energy saving capabilities of LED technology. This range offers different CCT with high lumen output. The lamps can quickly replace filament products in general lighting applications, and once in place rapid payback is achieved.

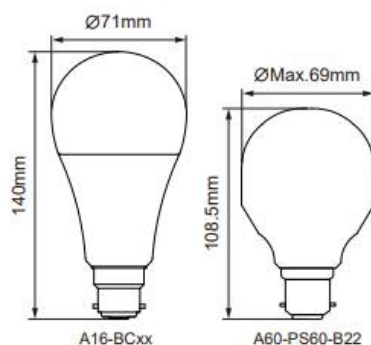

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	15,000 h
Protection Rating	Class II
Installation Area	Internal



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com