

# Filament GLS (Dim)

07743 FA7.3D-ES40

## Filament A60 (GLS) 7.3W Dimmable ES (E27) 4000K Clear

- Linear LED filament provides a traditional appearance
- Save energy up to 90% compared with an incandescent filament lamp
- Even light distribution



Technical Summary	
Product Code	FA7.3D-ES40
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	7.3 W
Power Factor	0.5
Default CCT	4,000 K
SDCM of CCT	<6
CRI	80
Dimmable	Y
Flicker	<10%
Lumens Output Maximum	806 lm
Maximum Efficiency	110 lm/W
L80B10 Lifetime (h) @Ta 25 °C	15,000 h
Nominal Lifetime (h)	15,000 h
Weight	0.032Kg
Dimensions (L x W x D) (mm)	106xØ60

## Overview

The Kosnic LED Filament lamp has a traditional appearance and gives an even spread of light in all directions. It is also highly functional and efficient. The lamps can quickly replace filament products in domestic and hospitality lighting applications, and once in place rapid payback is achieved.



## General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	15,000 h
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)


[Kosnic.com](http://Kosnic.com)



07743 FA7.3D-ES40

## Overview

The Kosnic LED Filament lamp has a traditional appearance and gives an even spread of light in all directions. It is also highly functional and efficient. The lamps can quickly replace filament products in domestic and hospitality lighting applications, and once in place rapid payback is achieved.

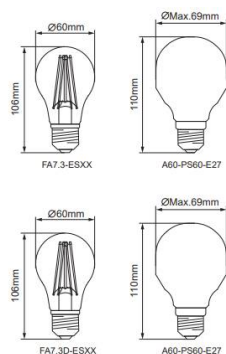

## General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	15,000 h
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

