

T8 Pro

07359 T8PRO17-W40

T8 LED Glass 17w 4ft 4000K Frosted

- High performance of up to 142lm/W
- Flicker free
- Save energy by up to 65%



Overview

These Kosnic advanced LED tubes are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises where users require uniform light to maintain well-being. The LED tubes can directly replace fluorescent tubes in magnetic ballast fittings with no rewiring.



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK02
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

Technical Summary

Product Code	T8PRO17-W40
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	17 W
Power Factor	>0.94
Default CCT	4,000 K
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	0.15%
Lumens Output Maximum	2,200 lm
Maximum Efficiency	129 lm/W
L80B10 Lifetime (h) @Ta 25 °C	50,000 h
Nominal Lifetime (h)	50,000 h
Weight	0.18Kg
Dimensions (L x W x D) (mm)	1214xØ28

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




T8 Pro

07359 T8PRO17-W40

Overview

These Kosnic advanced LED tubes are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises where users require uniform light to maintain well-being. The LED tubes can directly replace fluorescent tubes in magnetic ballast fittings with no rewiring.

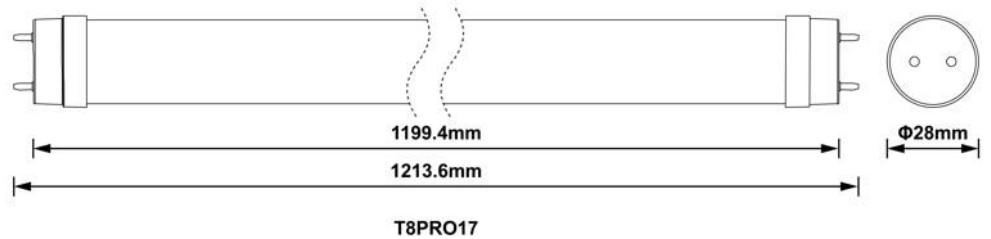

IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK02
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

