

T8 Pro

08291 T8PRO21-W40

T8 LED Glass 21w 5ft 4000K Frosted

- High performance of up to 142lm/W
- Flicker free
- Save energy by up to 65%



Overview

These Kosnic advanced LED tubes are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises where users require uniform light to maintain well-being. The LED tubes can directly replace fluorescent tubes in magnetic ballast fittings with no rewiring.



General Information

| | |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IK Rating | IK02 |
| IP Rating | IP20 |
| Nominal Lifetime (h) | 50,000 h |
| Protection Rating | Class I |
| Installation Area | Internal |

Technical Summary

| | |
|-------------------------------|--------------------|
| Product Code | T8PRO21-W40 |
| Input Voltage Supply | 220-240Vac 50/60Hz |
| Default Power | 21 W |
| Power Factor | >0.94 |
| Default CCT | 4,000 K |
| SDCM of CCT | <6 |
| CRI | 92 |
| Dimmable | N |
| Flicker | 0.20% |
| Lumens Output Maximum | 3,000 lm |
| Maximum Efficiency | 143 lm/W |
| L80B10 Lifetime (h) @Ta 25 °C | 50,000 h |
| Nominal Lifetime (h) | 50,000 h |
| Weight | 0.22Kg |
| Dimensions (L x W x D) (mm) | 1214xØ28 |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




T8 Pro

08291 T8PRO21-W40

Overview

These Kosnic advanced LED tubes are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises where users require uniform light to maintain well-being. The LED tubes can directly replace fluorescent tubes in magnetic ballast fittings with no rewiring.

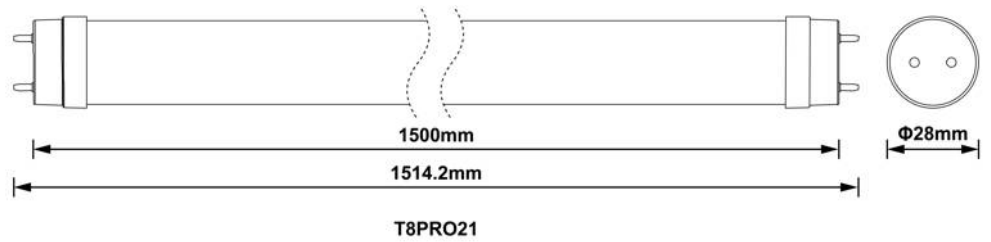

IP20



General Information

| | |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IK Rating | IK02 |
| IP Rating | IP20 |
| Nominal Lifetime (h) | 50,000 h |
| Protection Rating | Class I |
| Installation Area | Internal |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

