


SYGMA

DIGITAL LOW CONSUMPTION RADIATOR
PROGRAMABLE 24/7



Displayed model

SR1200RAD2 - Sygma 1200W white RAL 9016

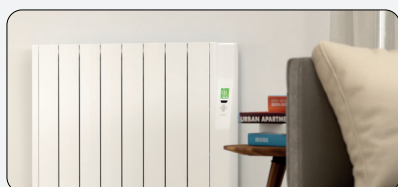

PLUG & PLAY INSTALLATION

Simple connection that allows you to enjoy cosy and comfortable warmth almost immediately.



REMOTE CONTROL

Infrared remote control available. More detailed information on page 24.



MAXIMUM ENERGY SAVINGS

The radiator only uses an average of 38% of its rated power to maintain comfort.¹



Displayed model

SR1250RADC3 - Sygma Short 1250W white RAL 9016



FEATURES

CONTROL AND TECHNOLOGY



5-button
mechanical panel



Green TFT
display



Optional remote
control



Comfort, Eco and
Anti-frost mode



Fuzzy Logic
Energy Control



Thermal Fluid
Tech



High sensitivity
thermostat

EFFICIENCY

38%

Effective
Power¹



Func. Open
Windows



Early Start
function

FUNCTIONALITY



Programmable
product & remote



Lock from
product & remote

DESIGN AND FINISHES



Top-opening
body



420 MM
Short model
available



100% aluminium
body




PC
ABS
PC/ABS
sides



White
RAL 9016

TECHNICAL SPECIFICATIONS

MODELS	SHORT VERSION					
	SRI0600RAD3	SRI1200RAD3	SRI1800RAD3	SRI1000RADC3	SRI1250RADC3	SRI1500RADC3
Nominal Power (W)	600	1200	1800	1000	1250	1500
Effective Power (W) ¹	210	420	630	350	437	525
Number of elements	4	8	12	8	10	12
Weight (Kg)	8.8	14.3	23.8	10.0	13.4	17.3
Recommended area (m ²)	From 3 to 8 m ²	From 6 to 16 m ²	From 14 to 25 m ²	From 5 to 14 m ²	From 6 to 17 m ²	From 7 to 21 m ²
Finishes	White RAL 9016			White RAL 9016		
EAN13	8435556163237	8435556163244	8435556163251	8435556163299	8435556163305	8435556163312

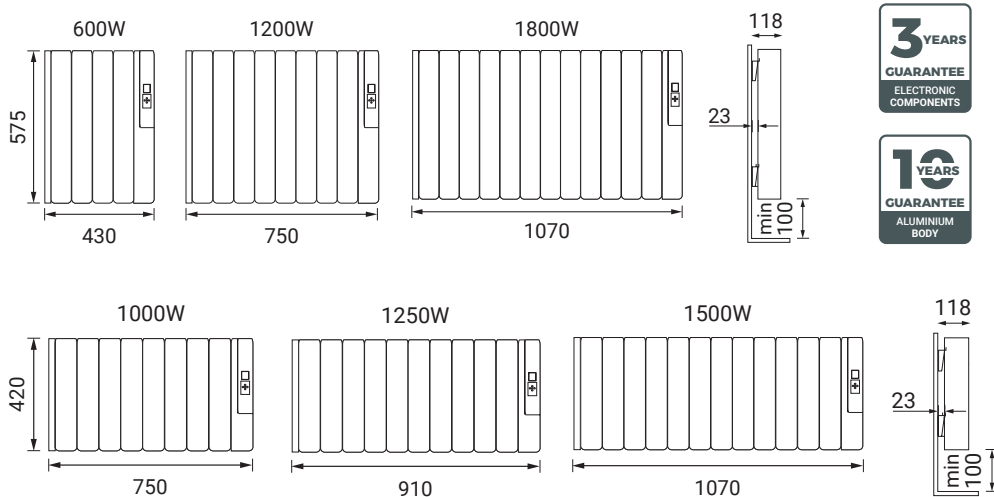SCHEME Dimensions in mm.

PRODUCT
VIDEO



AUGMENTED
REALITY



1) Tests carried out in independent laboratories.

The product includes 1.7 m cable with plug (outlet right side), brackets, installation kit + template and user manual.