



This specification has been downloaded from ElectrixInternational.com.

UK T25 | Metric Conduit Tee Box





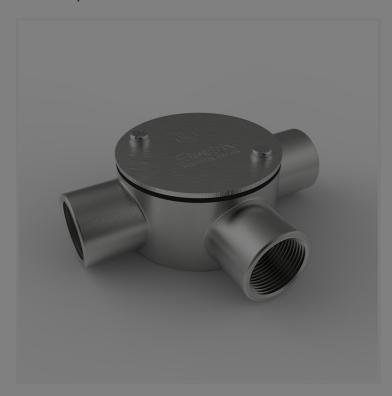



Electrix® Metric Conduit Tee Boxes, in 316C16F stainless steel with a 316L - V4A - 1.4404 stainless steel lid, can be used to change direction during an installation and to provide an additional outlet for conduit runs, whilst the removable lid provides access for inspection and installation purposes.

The world's first complete Stainless Steel Conduit System, invented by Electrix®, is known for its unrivalled quality and aesthetics.

Since the system was launched over 35 years ago, it has been specified by the world's largest companies, for projects ranging from oil rigs to monuments, tunnels to chemical processing plants.

This IP69K / IP67* tee box, complete with an internal earth point, is compatible with our 25 mm Metric Conduit System.

Each tee box is supplied with a lid, gasket, screws & washers.

SPECIFICATIONS		
Material Information		
Material Type	Stainless Steel	
Cookie Usage	Lid: 316L - V4A - 1.4404 Base: 316C16F	
By clicking "Accept All Cookies", you agree to the storing of cookies on your	Lid: Satin (Brushed) Base: Electropolished	
device to enhance site navigation, analyze site usage, and assist in our marketing efforts.		
	25	
Accept All Cookies	25	
Cookies Settings		
	Metric	
	Metric	
Thread Details	ISO form 1.5 mm pitch	

Conduit Box Ø (mm)	60.3
Gasket Material	2 mm Neoprene Rubber
Number of Lid Fixings	2
Ratings & Standards	
Approvals	CERTIFIED SAFETY US E233497 IPG9K IPG7 CE UK CA
UL Information	File Number: E233497 Conduit Systems for Cable Management Certified to IEC Standards
Environmental Rating	IP69K / IP67*
Operating Temperature (without Impact)	-25°C to +150°C (-13°F to +302°F) (with Blue Silicone Gasket) -15°C to +90°C (+5°F to +194°F) (with Black Neoprene Gasket)
For Use With	
For Conduit Ø (mm)	25
General Information	
Supplied With	Lid, Gasket & Lid Fixings
Ideally Suited For	Offshore, Chemical, Food, Dairy, Brewing, Pharmaceutical, Soft Drinks, Architectural companies & many more
Compatible With	Metric Conduit
Pack Quantity	1
Weight (kg)	0.42
Commodity Code	73071990
Fine Print	*IP rating is only maintained when all apertures are adequately sealed. In order to achieve this IP rating, the use of a suitable thread sealant is required on the final 3x threads of engagement. Earth / ground continuity must be maintained at all times.
Disclaimer	Images are representative of range and for illustration purposes only. Please check the full specifications for more information. All dimensions are subject to tolerances - please refer to the technical drawings.

Stainless Steel Electrical Enclosures, Trunking, Conduit, Wire Basket Tray, Cable Tray, Supports, Strut, Brackets & Fasteners

Head Office Contact Details:

+44 (0) 1388 774455

info@electrixinternational.com

www.electrixinternational.com

USA/Canada Sales Office:

1-888-774-4550 Toll-Free or +1 917-717-7445

1-888-774-4990 Toll-Free

usa@electrixinternational.com

www.electrixinternational.com

Nos Coordonnées:

0800 913132 (N° Gratuit - France) ou 0044 1388 774455

0044 1388 777359

info@electrix.fr

www.electrixinternational.com

Setzen Sie sich mit uns in Verbindung:

0800 1830118 (Deutschland) oder 0044 1388 774455

6 0044 1388 777359

info@kabelverlegungssysteme.com

www.electrixinternational.com

Certificate Registration No. 438273 QM15 Electrix International Ltd ISO 9001 : 2015