


This specification has been downloaded from ElectrixInternational.com.

UK UBOX20 | Metric Conduit Branch Two Way Box

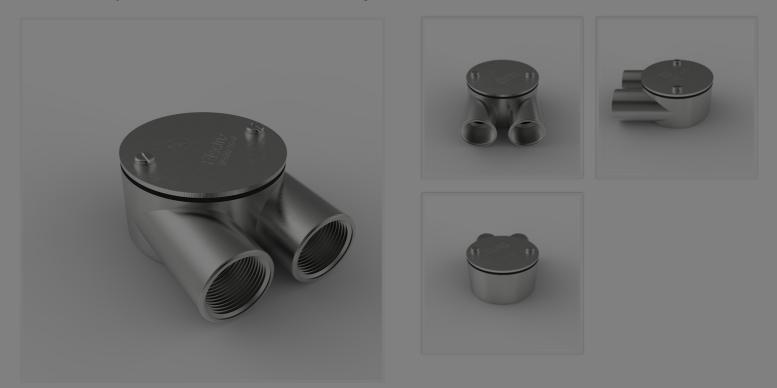

Electrix® Metric Conduit Branch Two Way Boxes, in 316C16F stainless steel with a 316L - V4A - 1.4404 stainless steel lid, can be used to change direction during an installation, whilst the removable lid provides access for inspection and installation purposes.

The world's first complete Stainless Steel Conduit System, invented by Electrix®, is known for its unrivalled quality and aesthetics.

Since the system was launched over 35 years ago, it has been specified by the world's largest companies, for projects ranging from oil rigs to monuments, tunnels to chemical processing plants.

This IP69K / IP67* branch two way box, complete with an internal earth point, is compatible with our 20 mm Metric Conduit System.

Each branch two way box is supplied with a lid, gasket, screws & washers.

SPECIFICATIONS						
Material Information						
Material Type	Stainless Steel					
Material Grade	Lid: 316L - V4A - 1.4404 Base: 316C16F					
Cookie Usage By clicking "Accept All Cookies", you	Lid: Satin (Brushed) Base: Electropolished					
agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our						
marketing efforts.	20					
	20					
Accept All Cookies						
Cookies Settings	Metric					
	Metric					
	ISO form 1.5 mm pitch					
Conduit Box Ø (mm)	60.3					

Gasket Material	2 mm Neoprene Rubber							
Number of Lid Fixings	2							
Ratings & Standards								
Approvals								
UL Information	File Number: E233497							
	Conduit Systems for Cable Management Certified to IEC Standards							
Environmental Rating	IP69K / IP67*							
Operating Temperature (without Impact)	-25°C to +150°C (-13°F to +302°F) (with Blue Silicone Gasket)							
	-15°C to +90°C (+5°F to +194°F) (with Black Neoprene Gasket)							
For Use With								
For Conduit Ø (mm)	20							
General Information								
Supplied With	Lid, Gasket & Lid Fixings							
Ideally Suited For	Offshore, Chemical, Food, Dairy, Brewing, Pharmaceutical, Soft Drinks, Architectural companies & many more							
Compatible With	Metric Conduit							
Pack Quantity	1							
Weight (kg)	0.36							
Commodity Code	73071990							
Fine Print	*IP rating is only maintained when all apertures are adequately sealed. In order to achieve this IP rating, the use of a suitable thread sealant is required on the final 3x threads of engagement. Earth / ground continuity must be maintained at all times.							
Disclaimer	Images are representative of range and for illustration purposes only. Please check the full specifications for more information. All dimensions are subject to tolerances - please refer to the technical drawings.							

Stainless Steel Electrical Enclosures, Trunking, Conduit, Wire Basket Tray, Cable Tray, Supports, Strut, Brackets & Fasteners

Head Office Contact Details:							
1388 774455 +44 (0)							
➡ +44 (0) 1388 777359							

	Τ.	44	(0)	10	00	C	/	/	/	33	27	
-			-										

 \times info@electrixinternational.com

www.electrixinternational.com

USA/Canada Sales Office:

- 1-888-774-4550 Toll-Free or +1 917-717-7445
- 🖶 1-888-774-4990 Toll-Free
- 🔀 usa@electrixinternational.com
- www.electrixinternational.com

Nos Coordonnées:

- 0800 913132 (N° Gratuit France) ou 0044 1388 774455
- O044 1388 777359
- info@electrix.fr
- www.electrixinternational.com
- oder 0044 1388 774455 O044 1388 777359

0800 1830118 (Deutschland)

🔀 info@kabelverlegungssysteme.com www.electrixinternational.com

Setzen Sie sich mit uns in Verbindung:



Certificate Registration No. 438273 QM15 Electrix International Ltd ISO 9001 : 2015

Registered Office: Electrix International Ltd, Dovecot Hill, South Church Enterprise Park, Bishop Auckland, Co. Durham, DL14 6XP, ENGLAND Electrix International Ltd is a UK registered company with company number 1570249 - VAT No. GB353998012