


SX 75-75 | Flat Lid Trunking 45° Inside Lid Bend



Electrix® Flat Lid Trunking 45° Bends, in 304 - V2A - 1.4301 stainless steel, are used to change direction during an installation. Our fully welded bends offer unrivalled quality & aesthetics.



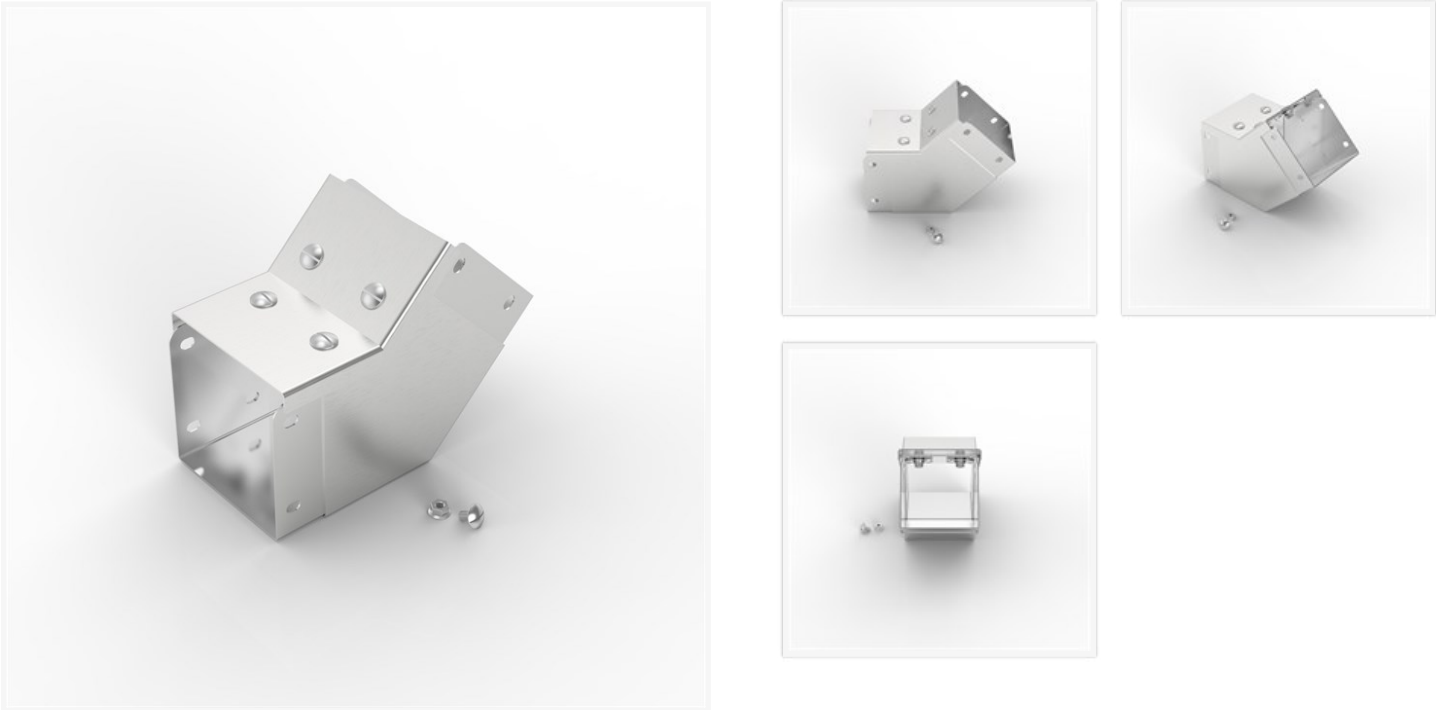

Fewer coupling screws are required due to our factory fitted couplings, making the installation easier to install and easier to clean.

This IP4X / IPXXD satin (brushed) finish 45° inside lid bend is compatible with our 75 x 75 (W x H mm) Flat Lid Trunking System.

Our unique system features a cover plate over each lid joint which reduces the ingress of foreign matter.

UL Listed.

SPECIFICATIONS	
Material Information	
Material Type	Stainless Steel
Material Grade	304 - V2A - 1.4301
Material Finish	Satin (Brushed)
Material Thickness (mm)	1.2
Dimensions	
Size (W x H mm)	75 x 75
Height (mm)	75
Width (mm)	75
Custom Design	Custom Designs available on request. <ul style="list-style-type: none">✓ 316L - V4A - 1.4404 material✓ Custom sizes✓ Alternative bend angles (e.g. 15°, 30°)✓ Pre-lasered cable entry holes & laser cut apertures✓ Multi-compartment✓ Lid safety chains✓ Lid gasket material Click here to visit The Custom Shop

Trunking Information	
Lid Position	Inside Lid Bend
Bend Angle	45°
Unique Cover Plate	Fitted over every lid joint, reduces the ingress of foreign matter
Ratings & Standards	
Approvals	   
UL Information	Surface Metal Raceway Fittings File Number: E233530 (60UB)
Environmental Rating	IP4X / IPXXD*
For Use With	
For Trunking Size (mm)	75 x 75
General Information	
Supplied With	Fitted Couplings, Lid Fastening Turnbuckles, Cover Plates, Nuts & Screws
Ideally Suited For	Food, Dairy, Brewing, Pharmaceutical, Soft Drinks, Architectural companies & many more
Compatible With	Flat Lid Trunking
Alternative Material Finish / Grade	Polished 304 - V2A - 1.4301
Pack Quantity	1
Weight (kg)	0.76
Commodity Code	73269098
Fine Print	*The IP rating is only maintained when all apertures are adequately sealed
Disclaimer	Images are representative of range and for illustration purposes only. Please check the full specifications for more information. All dimensions are subject to tolerances - please refer to the technical drawings.

Stainless Steel Electrical Enclosures, Trunking, Conduit, Wire Basket Tray, Cable Tray, Supports, Strut, Brackets & Fasteners

Head Office Contact Details:

 +44 (0) 1388 774455
 +44 (0) 1388 777359
 info@electrixinternational.com
 www.electrixinternational.com





USA/Canada Sales Office:

 1-888-774-4550 Toll-Free
 or +1 917-717-7445
 1-888-774-4990 Toll-Free
 usa@electrixinternational.com
 www.electrixinternational.com

Nos Coordonnées:

 0800 913132 (N° Gratuit - France)
 ou 0044 1388 774455
 0044 1388 777359
 info@electrix.fr
 www.electrixinternational.com

Setzen Sie sich mit uns in Verbindung:

 0800 1830118 (Deutschland)
 oder 0044 1388 774455
 0044 1388 777359
 info@kabelverlegungssysteme.com
 www.electrixinternational.com

Registered Office: Electrix International Ltd, Dovecot Hill, South Church Enterprise Park, Bishop Auckland, Co. Durham, DL14 6XP, ENGLAND
 Electrix International Ltd is a UK registered company with company number 1570249 - VAT No. GB353998012



Certificate Registration No. 438273 QM15
 Electrix International Ltd
 ISO 9001 : 2015