


Product Code: TPXB18S

Description: 18 Way Single Phase Extension Board

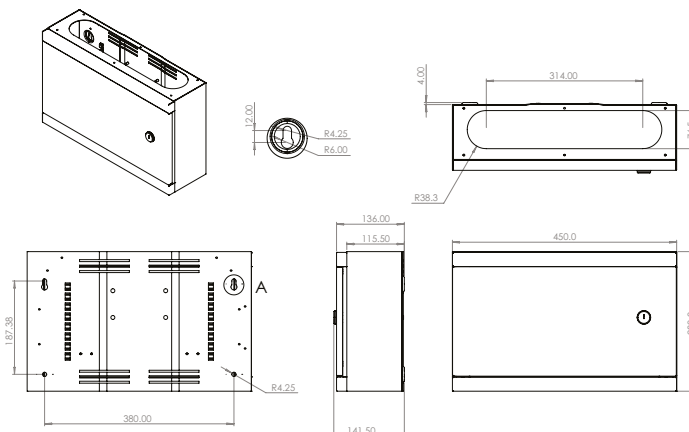

General Information

Dimensions With Door (mm)	450 (W) x 280 (H) x 140 (D)
Colour	White
Materials	Enclosure & Cover: Powder Coated Steel Pan Assembly / Chassis: Steel Plastic Components: ABS & Polycarbonate
Rated Operational Voltage (AC) (Ue)	230/400
Frequency (Hz)	50/60
Busbar Current Rating (A)	100
Busbar Rating (kA)	16
Maximum Rated Current (A) (In)	100
Total Ways	18
E&N Terminals	Screw
E&N Bars Capacity (mm ²)	25
Earth Lug Size	M8
Gland PLate	Not Supplied
Fire Resistance	650°C / 30s
Impact Rating	IK05
Ingress Protection	IP3X
Maximum Humidity (%)	95
Storage Temperature (°C)	-40 to +75
Operational Temperature (°C)	-5 to +40
Warranty (Years)	10
	E&N Bars Torque (Nm) 8.2 Earth Lug Torque (Nm) 4
	Warranty - Devices (Years) 3

Standards BS EN 61439-3

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.
Elucian metal distribution boards allow compliance with BS 7671 Wiring Regulations

Compatible Accessories TPSRBP: Synthetic Bonded Resin Paper with Slot
TPPLATE: Gland Plate
TPLABELK: Label Pack
TPLOCK: Three Phase Isolator Locking Kit

