


SY 50-50 | Flat Lid Trunking 45° Outside Lid Gusset Bend



Electrix® Flat Lid Trunking 45° Gusset Bends, in 304 - V2A - 1.4301 stainless steel, are used to change direction during an installation. Our bends offer unrivalled quality & aesthetics.



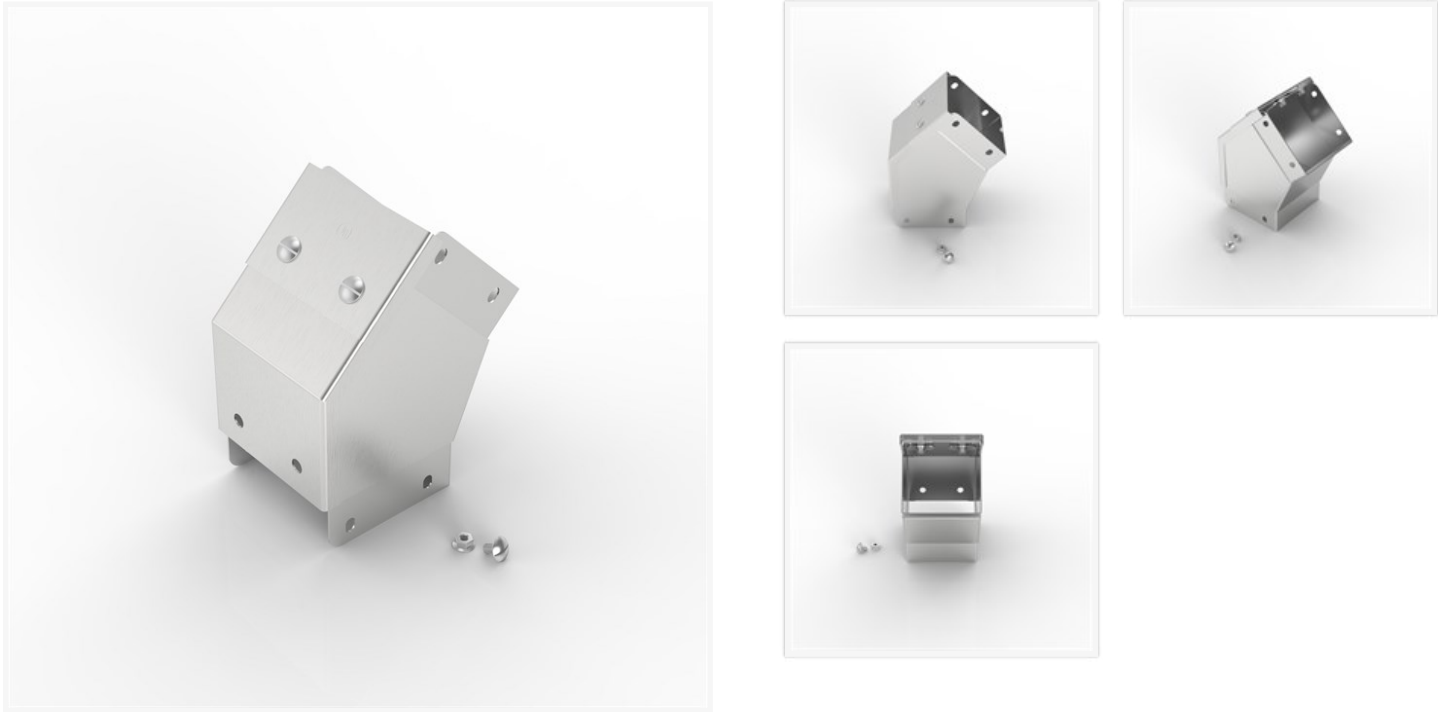

Fewer coupling screws are required due to our factory fitted couplings, making the installation easier to install and easier to clean.

This IP4X / IPXXD satin (brushed) finish 45° outside lid bend is compatible with both our 50 x 50 (W x H mm) Flat Lid Trunking System & Lighting Trunking System.

Our unique system features a cover plate over each lid joint which reduces the ingress of foreign matter.

UL Listed.

SPECIFICATIONS	
Material Information	
Material Type	Stainless Steel
Material Grade	304 - V2A - 1.4301
Material Finish	Satin (Brushed)
Material Thickness (mm)	1.2
Dimensions	
Size (W x H mm)	50 x 50
Height (mm)	50
Width (mm)	50
Custom Design	Custom Designs available on request. <ul style="list-style-type: none"><li>✓ 316L - V4A - 1.4404 material</li><li>✓ Custom sizes</li><li>✓ Alternative bend angles (e.g. 15°, 30°)</li><li>✓ Pre-lasered cable entry holes &amp; laser cut apertures</li><li>✓ Multi-compartment</li><li>✓ Lid safety chains</li><li>✓ Lid gasket material</li></ul> <a href="#">Click here to visit The Custom Shop</a> <a href="#">↗</a>


Trunking Information	
Lid Position	Outside Lid Bend
Bend Angle	45°
Unique Cover Plate	One fitted per lid, reduces the ingress of foreign matter
Ratings & Standards	
Approvals	   
UL Information	Surface Metal Raceway Fittings File Number: E233530 (60UB)
Environmental Rating	IP4X / IPXXD*
For Use With	
For Trunking Size (mm)	50 x 50
General Information	
Supplied With	Fitted Couplings, Lid Fastening Turnbuckles, Cover Plate, Nuts & Screws
Ideally Suited For	Food, Dairy, Brewing, Pharmaceutical, Soft Drinks, Architectural companies & many more
Compatible With	Flat Lid Trunking, Lighting Trunking
Alternative Material Finish / Grade	Polished 304 - V2A - 1.4301
Pack Quantity	1
Weight (kg)	0.41
Commodity Code	73269098
Fine Print	*The IP rating is only maintained when all apertures are adequately sealed
Disclaimer	Images are representative of range and for illustration purposes only. Please check the full specifications for more information. All dimensions are subject to tolerances - please refer to the technical drawings.

## Stainless Steel Electrical Enclosures, Trunking, Conduit, Wire Basket Tray, Cable Tray, Supports, Strut, Brackets & Fasteners

### Head Office Contact Details:

 +44 (0) 1388 774455  
 +44 (0) 1388 777359  
 [info@electrixinternational.com](mailto:info@electrixinternational.com)  
 [www.electrixinternational.com](http://www.electrixinternational.com)





### USA/Canada Sales Office:

 1-888-774-4550 Toll-Free  
 or +1 917-717-7445  
 1-888-774-4990 Toll-Free  
 [usa@electrixinternational.com](mailto:usa@electrixinternational.com)  
 [www.electrixinternational.com](http://www.electrixinternational.com)

### Nos Coordonnées:

 0800 913132 (N° Gratuit - France)  
 ou 0044 1388 774455  
 0044 1388 777359  
 [info@electrix.fr](mailto:info@electrix.fr)  
 [www.electrixinternational.com](http://www.electrixinternational.com)

### Setzen Sie sich mit uns in Verbindung:

 0800 1830118 (Deutschland)  
 oder 0044 1388 774455  
 0044 1388 777359  
 [info@kabelverlegungssysteme.com](mailto:info@kabelverlegungssysteme.com)  
 [www.electrixinternational.com](http://www.electrixinternational.com)

**Registered Office: Electrix International Ltd, Dovecot Hill, South Church Enterprise Park, Bishop Auckland, Co. Durham, DL14 6XP, ENGLAND**  
 Electrix International Ltd is a UK registered company with company number 1570249 - VAT No. GB353998012



Certificate Registration No. 438273 QM15  
 Electrix International Ltd  
 ISO 9001 : 2015