Data sheet **TRT036N**

TRT036N

7 Day Digital Heating Programmer – 2 Channel

Features & Benefits

- 2 independently programmed channels
- 7 day programming for use with room thermostat
- 3 timed control periods per day (5 day and 2 or 7 day programming)
- Programme copy function, holiday mode & manual ON/OFF override function
- 1 and 2 and 3 hour boost function for central heating and hot water
- 7 day factory fitted rechargeable battery backup
- Automatic summer/winter changeover
- Blue LED screen illuminates upon setting
- Change over contacts
- Optional pumped or gravity operation set by DIP switches

Technical Data

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Connection	3 Wire
Setting Type	Digital
Battery Type	3.6V 20mA Rechargeable
Power Reserve	Up to 28 days





Program Modes	24 Hour/7 Day, Holiday Mode, 1,2 or 3 Hour Boost, Pumped/Gravity System Modes
Switch Type	Single Pole, Single Throw (SPST) Both Channels
Mounting Hole Centres (mm)	60
Standby Consumption	<10W
Switch Rating	3A Resistive, 1A Inductive
Shortest Switching Time	1 Minute
Programmable Slots	3 ON, 3 OFF (Per Channel)
Cable Entry(s)	Back Entry


General

Weight (g)	211.7
Height (mm)	90
Width (mm)	135
Depth (mm)	30
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Rawl Plugs, Screws
EAN Number	5012483014424
Guarantee Period	3 Years
Trade Tariff Commodity Code	8536508090



Climate / Programastat Plus

Line Diagrams

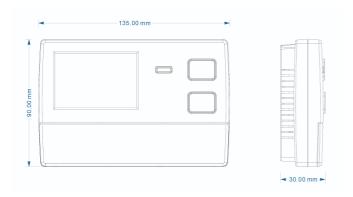



Subject to technical changes and revisions

additional information at: https://www.timeguard.com This data was generated on

29/05/2025